

Höganäs, Sweden, 2020-10-22

Cordstrap AnchorLash® 150.3 solution Certification of the compliance with the CTU Code MariTerm AB Certificate CS202005

MariTerm AB, Höganäs, Sweden, has on behalf of Cordstrap BV, Oostrum, the Netherlands, evaluated the strength and efficiency of the Cordstrap AnchorLash® 150.3 solution according to the principles of the IMO/ILO/UNECE Code of Practice for Packing of Cargo Transport Units (CTU Code).

The evaluation has been based on the following properties and strengths in the equipment:

Fully CTU Code compliant

- Lashing length and elongation
- Lashing angles
- Securing point rated strengths

Practical calculations

- Lashing length and elongation
- Lashing angles

A Cordstrap AnchorLash® 150.3 solution has the following system strength:

- SBS: 13500 daN
- MSL: 10125 daN

Where the component strengths are:

- SnapHooks in horizontal parts: BS 4000 daN; MSL 2000 daN
- Lashings: BS: 3426 daN, in a system: BS 4500 daN; MSL 3750 daN
- Buckles: BS 10000 daN; MSL 5000 daN
- MSL in the container anchor points: min 1000 daN
- MSL in the container roof lashing points: min 500 daN

It is hereby certified that the Cordstrap AnchorLash® 150.3 solution is an acceptable securing arrangement and fully complies with the CTU Code for the securing of the cargo weights given in the tables below. The calculations underlying these tables can be found in CS202005-A AnchorLash 150.3 – Appendix to certificate CS202005.



Sven Sökjer-Petersen, CEO
MariTerm AB



Lashing tables

The lashing tables below are based on the following modes of transport and accelerations:

Mode of transport	Horizontal acceleration	Vertical acceleration
Road (doors to the rear) and rail transport (doors in any direction)	0.5 g	1.0 g
Road transport (doors to the front)	0.8 g	1.0 g
Sea transport (sea area C – unrestricted)	0.4 g	1 ± 0.8 g

AnchorLash® 150.3 – 20ft CTU

Fully CTU Code compliant

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	7.4	4.7	9.3
0.1	8.8	5.1	9.7
0.2	10.6	5.7	10.1
0.3	13.5	6.5	10.5
0.4	18.6	7.4	11.0
0.45	22.9	8.1	11.2
0.5	no slide	8.8	11.5
0.6	no slide	10.6	12.0
0.7	no slide	13.5	12.6



Practical calculations

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	13.6	8.5	17.0
0.1	16.0	9.4	17.6
0.2	19.4	10.4	18.3
0.3	24.7	11.8	19.1
0.4	33.9	13.6	19.9
0.45	41.7	14.7	20.4
0.5	no slide	16.0	20.9
0.6	no slide	19.4	21.9
0.7	no slide	24.7	23.0



AnchorLash® 150.3 – 40ft CTU

Fully CTU Code compliant

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	6.6	4.2	8.3
0.1	7.8	4.6	8.6
0.2	9.5	5.1	9.0
0.3	12.1	5.8	9.4
0.4	16.6	6.6	9.8
0.45	20.4	7.2	10.0
0.5	no slide	7.8	10.2
0.6	no slide	9.5	10.7
0.7	no slide	12.1	11.3



Practical calculations

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	13.6	8.5	17.0
0.1	16.0	9.4	17.7
0.2	19.4	10.5	18.4
0.3	24.7	11.8	19.1
0.4	34.0	13.6	20.0
0.45	41.8	14.7	20.4
0.5	no slide	16.0	20.9
0.6	no slide	19.4	21.9
0.7	no slide	24.7	23.0



Notes regarding the application of the Cordstrap AnchorLash® 150.3 solution

Soft or deformable cargo should be adequately protected against breakage, damage or significant deformation, e.g. by applying edge protection and/or blocking boards. Appropriate measures should be applied to keep the lashing in the right position.

Please note that the values of secured cargo weight might differ slightly for specific solutions with different dimensions.

**Strength and efficiency of
Cordstrap AnchorLash® 150.3 solution**
Appendix CS202005-A
to MariTerm AB Certificate CS202005



Cordstrap AnchorLash® 150.3 solution in a 20ft CTU



Cordstrap AnchorLash® 150.3 solution in a 40ft CTU

Content

Preamble 6

Solution Elements Specifications..... 7

Theoretical lashing elongation, lengths, angles and forces – Cordstrap AnchorLash® 150.3 solution 7

 AnchorLash® 150.3 solution in 20ft CTU..... 9

 AnchorLash® 150.3 solution in 40ft CTU..... 10

Calculation of maximum secured cargo weight..... 11

Example calculation 11

Lashing tables - Cordstrap AnchorLash® 150.3 solutions 12

 Notes regarding the application of the Cordstrap AnchorLash® 150.3 solution..... 12

 AnchorLash® 150.3 – 20ft CTU 13

 AnchorLash® 150.3 – 40ft CTU 14

Preamble

MariTerm AB has on behalf of Cordstrap BV evaluated the strength and efficiency of the Cordstrap AnchorLash® 150.3 solution for securing of cargoes in freight containers. In addition Cordstrap BV and MariTerm AB have developed an Excel tool for generating tables for Quick Lashing Guides for these lashing solutions.

In this report, the theoretical background for the calculations of lashing forces as well as lashing tables for different modes of transport are given. The calculations are performed for 20ft and 40ft CTUs.

The calculations in this document are based on three principles:

- 1. Fully CTU Code compliant calculations where the following parameters have been taken into account:**
 - Lashing length and elongation
 - Lashing angles
 - Securing point rated strengths

- 2. Practical calculations where the following parameters have been taken into account:**
 - Lashing length and elongation
 - Lashing angles

- 3. System only calculations where the following parameters have been taken into account:**
 - MSL of lashings, buckles and hooks

The calculations principles 1 and 2 above comply with the principles in the IMO/ILO/UNECE Code of Practice for Packing of Cargo Transport Units (CTU Code). Principle 1 also respects the limit rated strength of securing points of the container.

Solution Elements Specifications

A Cordstrap AnchorLash® 150.3 solution consists of 2 sides, each with 3 pieces of lashing, as well as 3 buckles to close both sides together. A Cordstrap AnchorLash® 150.3 solution typically has all buckles at the same location one above the other.

A Cordstrap AnchorLash® 150.3 solution has the following system strength:

- SBS: 13500 daN
- MSL: 10125 daN

Where the component strengths are:

- SnapHooks in horizontal parts: BS 4000 daN; MSL 2000 daN
- Lashings: BS: 3426 daN, in a system: BS 4500 daN; MSL 3750 daN
- Buckles: BS 10000 daN; MSL 5000 daN
- MSL in the container anchor points: min 1000 daN
- MSL in the container roof lashing points: min 500 daN

Theoretical lashing elongation, lengths, angles and forces – Cordstrap AnchorLash® 150.3 solution

To calculate maximum secured cargo weight, the lashing elongation, length angles and maximum forces are considered.

The maximum lashing forces are restricted either by the container anchor points, container roof lashing points or the lashing MSL.

These maximum lashing forces represent a specific lashing elongation, which implies that the shortest lashing will reach the maximum lashing force first. The elongation at maximum force of the shortest lashing will give its lashing angle at maximum force, which again will give the cargo displacement at which this maximum force will occur.

Given this cargo displacement, the lashing angles and the elongation of the other lashings and therefore the force in the other lashings can be determined.

Finally, the total horizontal lateral force, and the total vertical force of the lashing can be determined given the lashing angles. If a Vertical HangStrap is used and if need be, these forces are adjusted down linearly to assure that the total vertical force does not exceed the rates strength of the container roof lashing point.


In the calculations in this document it is assumed that a recommended pre-tension of 25% MSL is applied. It is also assumed that the goods are rigid. For non-rigid goods i.e. carton boxes, plastic drums, big bags or small bags on pallets, please see CS202005-L – AnchorLash 150.3 – Load types addendum to Certificate 202005.

As presented in the calculation data below, the following sequence of calculations are made when determining the forces in the different lashings:

1. The maximum force allowed is established. The limiting factor is either the strength in the anchor point of the container or the MSL in the lashing, depending on which calculation principle is used. From this, the elongation in % at maximum force can be established.
2. The cargo displacement and the lashing length at maximum force in the shortest lashing are then calculated. The length of each lashing is depending on which container anchor point is used to fasten the lashing, the position of the Vertical lashing, the cargo dimensions, and the elongation of the lashing.
3. The angles for the different lashings are then calculated. This is depending on which container anchor point is used to fasten the lashing, the position of the Vertical lashing, the cargo dimensions, and the elongation of the lashing. This step is omitted for the system only principle.
4. The force in each lashing is then calculated. The force is divided into a horizontal force and a vertical force. The force is depending on the same parameters mentioned above as well as the breaking strength of the lashing.
5. Finally, the secured cargo weight for each principle is then established based on the lashing forces.

AnchorLash® 150.3 solution in 20ft CTU

The principal forces acting in the lashings, on the lashing/anchor points and on the cargo is presented in the figure below.

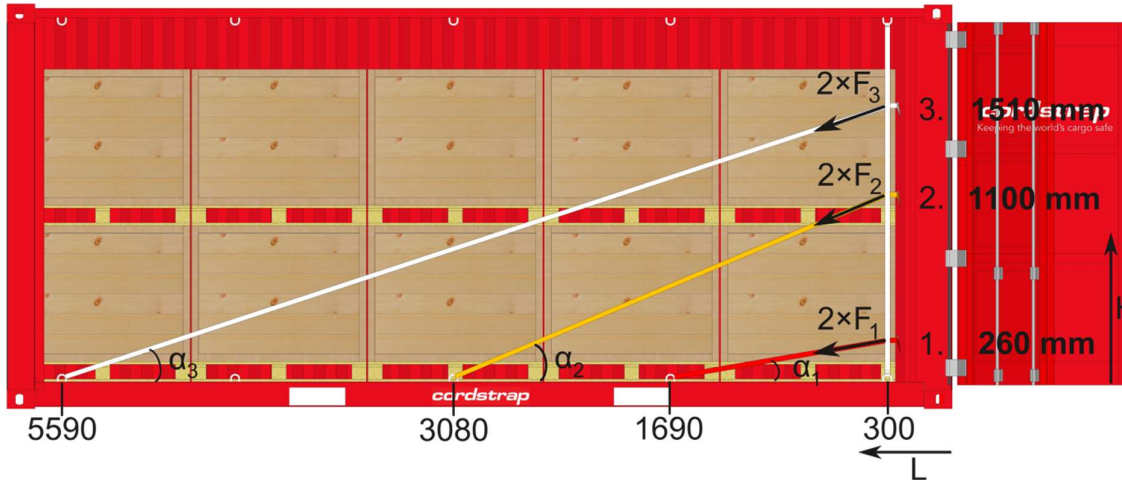

Cordstrap AnchorLash® 150.3 solution in 20ft CTU

CALCULATION OF ELONGATIONS				CTU Code compliant	Practical calc.	System only
PTe = ε @ pre-tension	PTe = Fpt / Flbs * LBSε	Fpt = Pre-tension	422 daN	1000 daN	1687.5 daN	1687.5 daN
MLe = ε @ max load	L0 = L / (1 + PTe)	PTe	1.7%	3.9%	6.6%	6.6%
LBSε = ε @ LBS	MLe = Fmax / Flbs * LBSε	Fmax = Max lashing force		2.2%	4.9%	4.9%
L = Lashing Length	relative MLe = (1 + MLe) * L0 / L - 1	MLe = Elongation @ Fmax				
L0 = Original Lashing Length		Flbs = LBS				


CALCULATION OF LASHING LENGTHS				CTU Code compliant	Practical calc.	System only
	Length before pre-tension	Length at max force w/o pre-tension	Length at max force	Length at max force	Length at max force	
Length Lashing 1	141.6 cm	139.3 cm	147.2 cm	144.8 cm	148.6 cm	148.6 cm
Length Lashing 2	299.2 cm	294.3 cm	304.8 cm	302.3 cm	306.1 cm	313.8 cm
Length Lashing 3	550.3 cm	541.3 cm	555.9 cm	553.5 cm	557.3 cm	577.3 cm
Cargo displacement:		5.6 cm	3.2 cm	6.9 cm	6.9 cm	6.9 cm

CALCULATION OF LASHING ANGLES				CTU Code compliant	Practical calc.	System only
		Angles at max force w/o pre-tension	Angles at max force	Angles at max force	Angles at max force	
Lashing Angle α1	10.6 °	10.6 °	10.6 °	10.6 °	0.0 °	
Lashing Angle α2	21.6 °	21.6 °	21.6 °	21.6 °	0.0 °	
Lashing Angle α3	15.9 °	15.9 °	15.9 °	15.9 °	0.0 °	

CALCULATION OF MAXIMUM FORCE IN LASHINGS													
Fmax, based on Lashing Points			Fmax, based on Lashing Points (CTU)			CTU Code compliant		Practical calc.		System only			
F	Fx	Fz MAX	F	Fx	Fz MAX	F max	Fx	Fz	Fx	Fz	Fx	Fz	
Force Lashing 1	838.4	824.1	-154.1	838.4	824.1	-154.1	1000.0	983.0	-183.9	1658.7	-310.3	1687.5	0.0
Force Lashing 2	583.1	542.2	-214.5	583.1	542.2	-214.5	695.5	646.7	-255.9	949.3	-375.6	1687.5	0.0
Force Lashing 3	478.4	460.0	-131.3	478.4	460.0	-131.3	570.6	548.7	-156.6	718.8	-205.2	1687.5	0.0
		-500.0			-500.0								

AnchorLash® 150.3 solution in 40ft CTU

The principal forces acting in the lashings, on the lashing/anchor points and on the cargo is presented in the figure below.

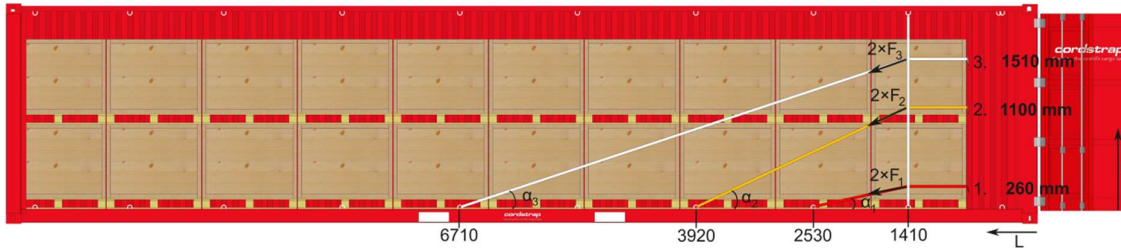

Cordstrap AnchorLash® 150.3 solution in 40ft CTU

CALCULATION OF ELONGATIONS				CTU Code compliant	Practical calc.	System only
PTe = ε @ pre-tension	PTe = Fpt / Flbs * LBSε	Fpt = Pre-tension	422 daN			
MLe = ε @ max load	LO = L / (1 + PTe)	PTe	1.7%			
LBSε = ε @ LBS	MLe = Fmax / Flbs * LBSε	Fmax = Max lashing force		1000 daN	1687.5 daN	1687.5 daN
L = Lashing Length	relative MLe = (1 + MLe) * LO / L - 1	MLe = Elongation @ Fmax		3.9%	6.6%	6.6%
LO = Original Lashing Length		relative MLe		2.2%	4.9%	4.9%
		Flbs = LBS				

CALCULATION OF LASHING LENGTHS				CTU Code compliant	Practical calc.	System only
	Length before pre-tension	Length at max force w/o pre-tension		Length at max force	Length at max force	Length at max force
Length Lashing 1	156.8 cm	154.2 cm	163.0 cm	160.3 cm	164.5 cm	164.5 cm
Length Lashing 2	315.8 cm	310.7 cm	322.0 cm	319.4 cm	323.5 cm	331.3 cm
Length Lashing 3	592.9 cm	583.2 cm	599.1 cm	596.4 cm	600.6 cm	622.0 cm
	Cargo displacement:	6.2 cm		3.5 cm	7.7 cm	7.7 cm

CALCULATION OF LASHING ANGLES				CTU Code compliant	Practical calc.	System only
		Angles at max force w/o pre-tension		Angles at max force	Angles at max force	Angles at max force
Lashing Angle α1	13.1 °	13.1 °		13.1 °	13.1 °	0.0 °
Lashing Angle α2	23.7 °	23.7 °		23.7 °	23.7 °	0.0 °
Lashing Angle α3	15.9 °	15.9 °		15.9 °	15.9 °	0.0 °

CALCULATION OF MAXIMUM FORCE IN LASHINGS													
	Fmax, based on Lashing Points			Fmax, based on Lashing Points (CTU)			F max	CTU Code compliant		Practical calc.		System only	
	F	Fx	Fz MAX	F	Fx	Fz MAX		Fx	Fz	Fx	Fz	Fx	Fz
Force Lashing 1	748.4	729.0	-169.2	748.4	729.0	-169.2	1000.0	974.1	-226.1	1643.8	-381.6	1687.5	0.0
Force Lashing 2	530.5	485.9	-212.9	530.5	485.9	-212.9	708.8	649.2	-284.5	961.8	-421.5	1687.5	0.0
Force Lashing 3	430.1	413.7	-117.9	430.1	413.7	-117.9	574.7	552.8	-157.5	727.6	-207.3	1687.5	0.0
			-500.0			-500.0							

Calculation of maximum secured cargo weight

The secured cargo weight in ton, m , is set up as follows for a CTU Code compliant calculation:

$$m = \frac{2 \cdot 10 \cdot (F_x - F_z \cdot \mu \cdot f_\mu)}{(c_x - c_z \cdot \mu \cdot f_\mu) \cdot g \cdot 1000}$$

where:

F_x	Horizontal force in lashing [daN]
F_z	Vertical force in lashing [daN]
c_x	Horizontal acceleration coefficient
c_z	Vertical acceleration coefficient
μ	Friction factor
f_μ	Conversion factor for dynamic friction
g	Gravity acceleration 9.81 [m/s ²]

Example calculation

For transport in sea area C with $c_x = 0.4$ backward, $c_z = 0.2$ downwards, the friction factor $\mu = 0.3$ and a 40ft CTU. The following secured cargo weight in ton is obtained for a CTU Code compliant calculation:

$$m = \frac{2 \cdot 10 \cdot ((729.0 + 485.9 + 413.7))}{(0.4 - 0.2 \cdot 0.3 \cdot 0.75) \cdot 9.81 \cdot 1000} = 9.4 \text{ ton}$$

Lashing tables - Cordstrap AnchorLash® 150.3 solutions

Each table gives the secured cargo weight in ton per lashing solution depending on the friction factor. The lashing tables are divided into two sections with sub sections:

1. 20ft CTU
 - a. Fully CTU Code compliant
 - b. Practical calculations
 - c. System only

2. 40ft CTU
 - a. Fully CTU Code compliant
 - b. Practical calculations
 - c. System only

The tables have been based on the accelerations in the IMO/ILO/UNECE Code of Practice for Packing of Cargo Transport Units (CTU Code), which are the following:

Mode of transport	Horizontal acceleration	Vertical acceleration
Road (doors to the rear) and rail transport (doors in any direction)	0.5 g	1.0 g
Road transport (doors to the front)	0.8 g	1.0 g
Sea transport (sea area C – unrestricted)	0.4 g	1 ± 0.8 g

Notes regarding the application of the Cordstrap AnchorLash® 150.3 solution

Soft or deformable cargo should be adequately protected against breakage, damage or significant deformation, e.g. by applying edge protection and/or blocking boards. Appropriate measures should be applied to keep the lashing in the right position.

Please note that the values of secured cargo weight might differ slightly for specific solutions with different dimensions.

AnchorLash® 150.3 – 20ft CTU

Fully CTU Code compliant

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	7.4	4.7	9.3
0.1	8.8	5.1	9.7
0.2	10.6	5.7	10.1
0.3	13.5	6.5	10.5
0.4	18.6	7.4	11.0
0.45	22.9	8.1	11.2
0.5	no slide	8.8	11.5
0.6	no slide	10.6	12.0
0.7	no slide	13.5	12.6



Practical calculations

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	13.6	8.5	17.0
0.1	16.0	9.4	17.6
0.2	19.4	10.4	18.3
0.3	24.7	11.8	19.1
0.4	33.9	13.6	19.9
0.45	41.7	14.7	20.4
0.5	no slide	16.0	20.9
0.6	no slide	19.4	21.9
0.7	no slide	24.7	23.0



System only

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	20.6	12.9	25.8
0.1	24.3	14.2	26.8
0.2	29.5	15.9	27.9
0.3	37.5	17.9	29.1
0.4	51.6	20.6	30.4
0.45	63.5	22.3	31.0
0.5	no slide	24.3	31.8
0.6	no slide	29.5	33.3
0.7	no slide	37.5	35.0



AnchorLash® 150.3 – 40ft CTU

Fully CTU Code compliant

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	6.6	4.2	8.3
0.1	7.8	4.6	8.6
0.2	9.5	5.1	9.0
0.3	12.1	5.8	9.4
0.4	16.6	6.6	9.8
0.45	20.4	7.2	10.0
0.5	no slide	7.8	10.2
0.6	no slide	9.5	10.7
0.7	no slide	12.1	11.3



Practical calculations

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	13.6	8.5	17.0
0.1	16.0	9.4	17.7
0.2	19.4	10.5	18.4
0.3	24.7	11.8	19.1
0.4	34.0	13.6	20.0
0.45	41.8	14.7	20.4
0.5	no slide	16.0	20.9
0.6	no slide	19.4	21.9
0.7	no slide	24.7	23.0



System only

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	20.6	12.9	25.8
0.1	24.3	14.2	26.8
0.2	29.5	15.9	27.9
0.3	37.5	17.9	29.1
0.4	51.6	20.6	30.4
0.45	63.5	22.3	31.0
0.5	no slide	24.3	31.8
0.6	no slide	29.5	33.3
0.7	no slide	37.5	35.0



**Load types addendum of
Cordstrap AnchorLash® 150.3 solution
Addendum CS202005-L
to MariTerm certificate CS202005**



Cordstrap AnchorLash® 150.3 solution in a 20ft CTU



Cordstrap AnchorLash® 150.3 solution in a 40ft CTU

Content

Preamble..... 16

Lashing tables 18

- IBCs 19
 - AnchorLash® 150.3 – 20ft CTU - IBCs 19*
 - AnchorLash® 150.3 – 40ft CTU - IBCs 20*
- SoftPackaging 21
 - AnchorLash® 150.3 – 20ft CTU - SoftPackaging 21*
 - AnchorLash® 150.3 – 40ft CTU – SoftPackaging 22*
- Drums – floor loaded..... 23
 - AnchorLash® 150.3– 20ft CTU – Drums – floor loaded 23*
 - AnchorLash® 150.3– 40ft CTU – Drums – floor loaded 24*
- Drums – palletized..... 25
 - AnchorLash® 150.3 – 20ft CTU – Drums – palletized 25*
 - AnchorLash® 150.3 – 40ft CTU – Drums – palletized 26*
- Soft Drums – floor loaded 27
 - AnchorLash® 150.3 – 20ft CTU – Soft Drums – floor loaded 27*
 - AnchorLash® 150.3 – 40ft CTU – Soft Drums – floor loaded 28*
- Soft Drums – palletized 29
 - AnchorLash® 150.3 – 20ft CTU – Soft Drums – palletized 29*
 - AnchorLash® 150.3 – 40ft CTU – Soft Drums – palletized 30*
- Small BigBags..... 31
 - AnchorLash® 150.3 – 20ft CTU – Small BigBags..... 31*
 - AnchorLash® 150.3 – 40ft CTU – Small BigBags..... 32*
- Large BigBags..... 33
 - AnchorLash® 150.3 – 20ft CTU – Large BigBags 33*
 - AnchorLash® 150.3 – 40ft CTU – Large BigBags 34*
- Small BigBags with soft materials 35
 - AnchorLash® 150.3 – 20ft CTU – Small BigBags with soft material..... 35*
 - AnchorLash® 150.3 – 40ft CTU – Small BigBags with soft material..... 36*
- Large BigBags with soft materials 37
 - AnchorLash® 150.3 – 20ft CTU – Large BigBags with soft material 37*
 - AnchorLash® 150.3 – 40ft CTU – Large BigBags with soft material 38*
- Notes regarding the application of the Cordstrap AnchorLash® 150.3 solution 39

Preamble

MariTerm AB, Höganäs, Sweden, has on behalf of Cordstrap BV, Oostrum, the Netherlands, evaluated the strength and efficiency of the Cordstrap AnchorLash® 150.3 solution according to the principles of the IMO/ILO/UNECE Code of Practice for Packing of Cargo Transport Units (CTU Code).

In this document, lashing tables can be found for different load types for both 20ft and 40ft CTUs.

The evaluation has been based on the following properties and strengths in the equipment:

Fully CTU Code compliant

- Lashing length and elongation
- Lashing angles
- Securing point rated strengths

Practical calculations

- Lashing length and elongation
- Lashing angles

System only

- MSL of lashings, buckles and hooks

A Cordstrap AnchorLash® 150.3 solution has the following system strength:

- SBS: 12000 daN
- MSL: 9000 daN

Where the component strengths are:

- SnapHooks in horizontal parts: BS 4000 daN; MSL 2000 daN
- Lashings: BS: 3426 daN, in a system: BS 4500 daN; MSL 3750 daN
- Buckles: BS 10000 daN; MSL 5000 daN
- MSL in the container anchor points: min 1000 daN
- MSL in the container roof lashing points: min 500 daN

The calculations underlying these tables can be found in CS202005-A AnchorLash 150.3 – Appendix to certificate CS202005.

Lashing tables

The lashing tables below are based on the following modes of transport and accelerations:

Mode of transport	Horizontal acceleration	Vertical acceleration
Road (doors to the rear) and rail transport (doors in any direction)	0.5 g	1.0 g
Road transport (doors to the front)	0.8 g	1.0 g
Sea transport (sea area C – unrestricted)	0.4 g	1 ± 0.8 g

IBCs

IBC Protectors are used to keep the lashings in place.

AnchorLash® 150.3 – 20ft CTU - IBCs

Fully CTU Code compliant

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	9.1	5.7	11.4
0.1	10.7	6.3	11.9
0.2	13.0	7.0	12.3
0.3	16.6	7.9	12.9
0.4	22.8	9.1	13.4
0.45	28.1	9.9	13.7
0.5	no slide	10.7	14.0
0.6	no slide	13.0	14.7
0.7	no slide	16.6	15.5



Practical calculations

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	14.2	8.9	17.8
0.1	16.7	9.8	18.4
0.2	20.3	10.9	19.2
0.3	25.8	12.4	20.0
0.4	35.5	14.2	20.9
0.45	43.7	15.4	21.4
0.5	no slide	16.7	21.9
0.6	no slide	20.3	22.9
0.7	no slide	25.8	24.1



System only

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	20.6	12.9	25.8
0.1	24.3	14.2	26.8
0.2	29.5	15.9	27.9
0.3	37.5	17.9	29.1
0.4	51.6	20.6	30.4
0.45	63.5	22.3	31.0
0.5	no slide	24.3	31.8
0.6	no slide	29.5	33.3
0.7	no slide	37.5	35.0



AnchorLash® 150.3 – 40ft CTU - IBCs

Fully CTU Code compliant

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	8.5	5.3	10.7
0.1	10.0	5.9	11.1
0.2	12.2	6.6	11.5
0.3	15.5	7.4	12.0
0.4	21.3	8.5	12.5
0.45	26.2	9.2	12.8
0.5	no slide	10.0	13.1
0.6	no slide	12.2	13.8
0.7	no slide	15.5	14.5



Practical calculations

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	12.7	7.9	15.8
0.1	14.9	8.7	16.5
0.2	18.1	9.7	17.1
0.3	23.0	11.0	17.9
0.4	31.7	12.7	18.6
0.45	39.0	13.7	19.1
0.5	no slide	14.9	19.5
0.6	no slide	18.1	20.4
0.7	no slide	23.0	21.5



System only

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	20.6	12.9	25.8
0.1	24.3	14.2	26.8
0.2	29.5	15.9	27.9
0.3	37.5	17.9	29.1
0.4	51.6	20.6	30.4
0.45	63.5	22.3	31.0
0.5	no slide	24.3	31.8
0.6	no slide	29.5	33.3
0.7	no slide	37.5	35.0



SoftPackaging

Edgeboards are used to keep the lashings in place.

AnchorLash® 150.3 – 20ft CTU - SoftPackaging

Fully CTU Code compliant

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	9.5	6.0	11.9
0.1	11.2	6.6	12.4
0.2	13.6	7.3	12.9
0.3	17.3	8.3	13.4
0.4	23.8	9.5	14.0
0.45	29.3	10.3	14.3
0.5	no slide	11.2	14.7
0.6	no slide	13.6	15.4
0.7	no slide	17.3	16.1



Practical calculations

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	14.9	9.3	18.7
0.1	17.6	10.3	19.4
0.2	21.3	11.5	20.2
0.3	27.1	13.0	21.0
0.4	37.3	14.9	22.0
0.45	45.9	16.1	22.4
0.5	no slide	17.6	23.0
0.6	no slide	21.3	24.1
0.7	no slide	27.1	25.3



System only

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	20.6	12.9	25.8
0.1	24.3	14.2	26.8
0.2	29.5	15.9	27.9
0.3	37.5	17.9	29.1
0.4	51.6	20.6	30.4
0.45	63.5	22.3	31.0
0.5	no slide	24.3	31.8
0.6	no slide	29.5	33.3
0.7	no slide	37.5	35.0



AnchorLash® 150.3 – 40ft CTU – SoftPackaging

Fully CTU Code compliant

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	9.5	5.9	11.8
0.1	11.1	6.5	12.3
0.2	13.5	7.3	12.8
0.3	17.2	8.2	13.3
0.4	23.6	9.5	13.9
0.45	29.1	10.2	14.2
0.5	no slide	11.1	14.6
0.6	no slide	13.5	15.3
0.7	no slide	17.2	16.0



Practical calculations

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	14.8	9.2	18.5
0.1	17.4	10.2	19.2
0.2	21.1	11.4	20.0
0.3	26.9	12.9	20.8
0.4	36.9	14.8	21.7
0.45	45.5	16.0	22.2
0.5	no slide	17.4	22.7
0.6	no slide	21.1	23.8
0.7	no slide	26.9	25.1



System only

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	20.6	12.9	25.8
0.1	24.3	14.2	26.8
0.2	29.5	15.9	27.9
0.3	37.5	17.9	29.1
0.4	51.6	20.6	30.4
0.45	63.5	22.3	31.0
0.5	no slide	24.3	31.8
0.6	no slide	29.5	33.3
0.7	no slide	37.5	35.0



Drums – floor loaded

Hangstraps are used to keep the lashings in place.

AnchorLash® 150.3– 20ft CTU – Drums – floor loaded

Fully CTU Code compliant

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	6.8	4.3	8.6
0.1	8.1	4.7	8.9
0.2	9.8	5.3	9.3
0.3	12.4	6.0	9.6
0.4	17.1	6.8	10.1
0.45	21.1	7.4	10.3
0.5	no slide	8.1	10.5
0.6	no slide	9.8	11.0
0.7	no slide	12.4	11.6



Practical calculations

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	13.8	8.6	17.3
0.1	16.3	9.5	18.0
0.2	19.7	10.6	18.7
0.3	25.1	12.0	19.5
0.4	34.6	13.8	20.3
0.45	42.5	14.9	20.8
0.5	no slide	16.3	21.3
0.6	no slide	19.7	22.3
0.7	no slide	25.1	23.4



System only

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	20.6	12.9	25.8
0.1	24.3	14.2	26.8
0.2	29.5	15.9	27.9
0.3	37.5	17.9	29.1
0.4	51.6	20.6	30.4
0.45	63.5	22.3	31.0
0.5	no slide	24.3	31.8
0.6	no slide	29.5	33.3
0.7	no slide	37.5	35.0



AnchorLash® 150.3– 40ft CTU – Drums – floor loaded

Fully CTU Code compliant

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	8.2	5.1	10.3
0.1	9.7	5.7	10.7
0.2	11.7	6.3	11.1
0.3	14.9	7.1	11.6
0.4	20.5	8.2	12.1
0.45	25.3	8.9	12.3
0.5	no slide	9.7	12.6
0.6	no slide	11.7	13.2
0.7	no slide	14.9	13.9



Practical calculations

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	15.1	9.4	18.9
0.1	17.8	10.4	19.6
0.2	21.6	11.6	20.4
0.3	27.4	13.1	21.3
0.4	37.7	15.1	22.2
0.45	46.4	16.3	22.7
0.5	no slide	17.8	23.2
0.6	no slide	21.6	24.3
0.7	no slide	27.4	25.6



System only

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	20.6	12.9	25.8
0.1	24.3	14.2	26.8
0.2	29.5	15.9	27.9
0.3	37.5	17.9	29.1
0.4	51.6	20.6	30.4
0.45	63.5	22.3	31.0
0.5	no slide	24.3	31.8
0.6	no slide	29.5	33.3
0.7	no slide	37.5	35.0



Drums – palletized

Hangstraps are used to keep the lashings in place.

AnchorLash® 150.3 – 20ft CTU – Drums – palletized

Fully CTU Code compliant

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	6.7	4.2	8.4
0.1	7.9	4.6	8.7
0.2	9.6	5.1	9.0
0.3	12.2	5.8	9.4
0.4	16.7	6.7	9.8
0.45	20.6	7.2	10.1
0.5	no slide	7.9	10.3
0.6	no slide	9.6	10.8
0.7	no slide	12.2	11.3



Practical calculations

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	13.8	8.6	17.3
0.1	16.2	9.5	17.9
0.2	19.7	10.6	18.6
0.3	25.1	12.0	19.4
0.4	34.5	13.8	20.3
0.45	42.5	14.9	20.8
0.5	no slide	16.2	21.2
0.6	no slide	19.7	22.3
0.7	no slide	25.1	23.4



System only

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	20.6	12.9	25.8
0.1	24.3	14.2	26.8
0.2	29.5	15.9	27.9
0.3	37.5	17.9	29.1
0.4	51.6	20.6	30.4
0.45	63.5	22.3	31.0
0.5	no slide	24.3	31.8
0.6	no slide	29.5	33.3
0.7	no slide	37.5	35.0



AnchorLash® 150.3 – 40ft CTU – Drums – palletized

Fully CTU Code compliant

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	7.9	5.0	9.9
0.1	9.3	5.5	10.3
0.2	11.3	6.1	10.7
0.3	14.4	6.9	11.2
0.4	19.8	7.9	11.7
0.45	24.4	8.6	11.9
0.5	no slide	9.3	12.2
0.6	no slide	11.3	12.8
0.7	no slide	14.4	13.5



Practical calculations

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	15.1	9.4	18.8
0.1	17.7	10.4	19.6
0.2	21.5	11.6	20.4
0.3	27.4	13.1	21.2
0.4	37.7	15.1	22.2
0.45	46.4	16.3	22.7
0.5	no slide	17.7	23.2
0.6	no slide	21.5	24.3
0.7	no slide	27.4	25.5



System only

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	20.6	12.9	25.8
0.1	24.3	14.2	26.8
0.2	29.5	15.9	27.9
0.3	37.5	17.9	29.1
0.4	51.6	20.6	30.4
0.45	63.5	22.3	31.0
0.5	no slide	24.3	31.8
0.6	no slide	29.5	33.3
0.7	no slide	37.5	35.0



Soft Drums – floor loaded

Flexboards are used to keep the lashings in place.

AnchorLash® 150.3 – 20ft CTU – Soft Drums – floor loaded

Fully CTU Code compliant

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	9.1	5.7	11.4
0.1	11.0	6.4	12.1
0.2	13.7	7.4	12.9
0.3	17.8	8.5	13.8
0.4	25.1	10.0	14.7
0.45	31.2	11.0	15.2
0.5	no slide	12.1	15.8
0.6	no slide	15.0	16.9
0.7	no slide	19.5	18.2



Practical calculations

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	13.2	8.3	16.6
0.1	16.0	9.4	17.6
0.2	19.9	10.7	18.8
0.3	25.9	12.4	20.1
0.4	36.5	14.6	21.5
0.45	45.5	16.0	22.2
0.5	no slide	17.6	23.0
0.6	no slide	21.8	24.7
0.7	no slide	28.4	26.5



System only

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	20.6	12.9	25.8
0.1	24.3	14.2	26.8
0.2	29.5	15.9	27.9
0.3	37.5	17.9	29.1
0.4	51.6	20.6	30.4
0.45	63.5	22.3	31.0
0.5	no slide	24.3	31.8
0.6	no slide	29.5	33.3
0.7	no slide	37.5	35.0



AnchorLash® 150.3 – 40ft CTU – Soft Drums – floor loaded

Fully CTU Code compliant

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	9.7	6.1	12.2
0.1	11.6	6.8	12.8
0.2	14.2	7.6	13.4
0.3	18.2	8.7	14.1
0.4	25.2	10.1	14.9
0.45	31.2	11.0	15.3
0.5	no slide	12.0	15.7
0.6	no slide	14.7	16.6
0.7	no slide	18.8	17.6



Practical calculations

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	14.1	8.8	17.7
0.1	16.8	9.8	18.5
0.2	20.5	11.1	19.4
0.3	26.3	12.6	20.4
0.4	36.5	14.6	21.5
0.45	45.1	15.9	22.0
0.5	no slide	17.3	22.6
0.6	no slide	21.2	23.9
0.7	no slide	27.2	25.3



System only

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	20.6	12.9	25.8
0.1	24.3	14.2	26.8
0.2	29.5	15.9	27.9
0.3	37.5	17.9	29.1
0.4	51.6	20.6	30.4
0.45	63.5	22.3	31.0
0.5	no slide	24.3	31.8
0.6	no slide	29.5	33.3
0.7	no slide	37.5	35.0



Soft Drums – palletized

Flexboards are used to keep the lashings in place.

AnchorLash® 150.3 – 20ft CTU – Soft Drums – palletized

Fully CTU Code compliant

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	9.1	5.7	11.3
0.1	11.0	6.4	12.1
0.2	13.6	7.3	12.9
0.3	17.8	8.5	13.8
0.4	25.1	10.0	14.7
0.45	31.2	11.0	15.2
0.5	no slide	12.1	15.8
0.6	no slide	15.0	16.9
0.7	no slide	19.5	18.2



Practical calculations

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	13.2	8.3	16.5
0.1	16.0	9.4	17.6
0.2	19.9	10.7	18.8
0.3	25.9	12.4	20.1
0.4	36.5	14.6	21.5
0.45	45.5	16.0	22.2
0.5	no slide	17.6	23.0
0.6	no slide	21.9	24.7
0.7	no slide	28.5	26.5



System only

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	20.6	12.9	25.8
0.1	24.3	14.2	26.8
0.2	29.5	15.9	27.9
0.3	37.5	17.9	29.1
0.4	51.6	20.6	30.4
0.45	63.5	22.3	31.0
0.5	no slide	24.3	31.8
0.6	no slide	29.5	33.3
0.7	no slide	37.5	35.0



AnchorLash® 150.3 – 40ft CTU – Soft Drums – palletized

Fully CTU Code compliant

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	9.7	6.1	12.2
0.1	11.6	6.8	12.8
0.2	14.2	7.6	13.4
0.3	18.2	8.7	14.1
0.4	25.3	10.1	14.9
0.45	31.2	11.0	15.3
0.5	no slide	12.0	15.7
0.6	no slide	14.7	16.6
0.7	no slide	18.9	17.6



Practical calculations

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	14.1	8.8	17.7
0.1	16.8	9.8	18.5
0.2	20.5	11.1	19.4
0.3	26.3	12.6	20.4
0.4	36.5	14.6	21.5
0.45	45.2	15.9	22.1
0.5	no slide	17.3	22.7
0.6	no slide	21.2	24.0
0.7	no slide	27.2	25.4



System only

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	20.6	12.9	25.8
0.1	24.3	14.2	26.8
0.2	29.5	15.9	27.9
0.3	37.5	17.9	29.1
0.4	51.6	20.6	30.4
0.45	63.5	22.3	31.0
0.5	no slide	24.3	31.8
0.6	no slide	29.5	33.3
0.7	no slide	37.5	35.0



Small BigBags

Hangstraps are used to keep the lashings in place.

AnchorLash® 150.3 – 20ft CTU – Small BigBags

Fully CTU Code compliant

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	5.1	3.2	6.4
0.1	6.1	3.5	6.7
0.2	7.3	4.0	6.9
0.3	9.4	4.5	7.2
0.4	12.9	5.1	7.6
0.45	15.8	5.6	7.7
0.5	no Slide	6.1	7.9
0.6	no Slide	7.3	8.3
0.7	no Slide	9.4	8.7



Practical calculations

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	13.3	8.3	16.6
0.1	15.6	9.2	17.3
0.2	19.0	10.2	18.0
0.3	24.2	11.6	18.7
0.4	33.2	13.3	19.6
0.45	40.9	14.4	20.0
0.5	no slide	15.6	20.5
0.6	no slide	19.0	21.4
0.7	no slide	24.2	22.5



System only

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	20.6	12.9	25.8
0.1	24.3	14.2	26.8
0.2	29.5	15.9	27.9
0.3	37.5	17.9	29.1
0.4	51.6	20.6	30.4
0.45	63.5	22.3	31.0
0.5	no slide	24.3	31.8
0.6	no slide	29.5	33.3
0.7	no slide	37.5	35.0



AnchorLash® 150.3 – 40ft CTU – Small BigBags

Fully CTU Code compliant

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	9.3	5.8	11.6
0.1	11.0	6.4	12.1
0.2	13.3	7.2	12.6
0.3	16.9	8.1	13.1
0.4	23.3	9.3	13.7
0.45	28.6	10.1	14.0
0.5	no slide	11.0	14.3
0.6	no slide	13.3	15.0
0.7	no slide	16.9	15.8



Practical calculations

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	14.4	9.0	18.0
0.1	16.9	9.9	18.7
0.2	20.5	11.1	19.4
0.3	26.1	12.5	20.2
0.4	35.9	14.4	21.1
0.45	44.2	15.5	21.6
0.5	no slide	16.9	22.1
0.6	no slide	20.5	23.2
0.7	no slide	26.1	24.4



System only

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	20.6	12.9	25.8
0.1	24.3	14.2	26.8
0.2	29.5	15.9	27.9
0.3	37.5	17.9	29.1
0.4	51.6	20.6	30.4
0.45	63.5	22.3	31.0
0.5	no slide	24.3	31.8
0.6	no slide	29.5	33.3
0.7	no slide	37.5	35.0



Large BigBags

Hangstraps are used to keep the lashings in place.

AnchorLash® 150.3 – 20ft CTU – Large BigBags

Fully CTU Code compliant

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	8.8	5.5	11.0
0.1	10.3	6.1	11.4
0.2	12.5	6.8	11.9
0.3	16.0	7.6	12.4
0.4	21.9	8.8	12.9
0.45	27.0	9.5	13.2
0.5	no slide	10.3	13.5
0.6	no slide	12.5	14.2
0.7	no slide	16.0	14.9



Practical calculations

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	14.0	8.7	17.5
0.1	16.4	9.6	18.1
0.2	19.9	10.7	18.9
0.3	25.4	12.1	19.7
0.4	34.9	14.0	20.5
0.45	43.0	15.1	21.0
0.5	no slide	16.4	21.5
0.6	no slide	19.9	22.5
0.7	no slide	25.4	23.7



System only

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	20.6	12.9	25.8
0.1	24.3	14.2	26.8
0.2	29.5	15.9	27.9
0.3	37.5	17.9	29.1
0.4	51.6	20.6	30.4
0.45	63.5	22.3	31.0
0.5	no slide	24.3	31.8
0.6	no slide	29.5	33.3
0.7	no slide	37.5	35.0



AnchorLash® 150.3 – 40ft CTU – Large BigBags

Fully CTU Code compliant

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	7.7	4.8	9.7
0.1	9.1	5.3	10.1
0.2	11.1	6.0	10.5
0.3	14.1	6.7	10.9
0.4	19.4	7.7	11.4
0.45	23.8	8.4	11.7
0.5	no slide	9.1	11.9
0.6	no slide	11.1	12.5
0.7	no slide	14.1	13.1



Practical calculations

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	14.1	8.8	17.7
0.1	16.6	9.7	18.4
0.2	20.2	10.9	19.1
0.3	25.7	12.3	19.9
0.4	35.3	14.1	20.8
0.45	43.5	15.3	21.3
0.5	no slide	16.6	21.7
0.6	no slide	20.2	22.8
0.7	no slide	25.7	24.0



System only

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	20.6	12.9	25.8
0.1	24.3	14.2	26.8
0.2	29.5	15.9	27.9
0.3	37.5	17.9	29.1
0.4	51.6	20.6	30.4
0.45	63.5	22.3	31.0
0.5	no slide	24.3	31.8
0.6	no slide	29.5	33.3
0.7	no slide	37.5	35.0



Small BigBags with soft materials

Flexboards are used to keep the lashings in place.

AnchorLash® 150.3 – 20ft CTU – Small BigBags with soft material

Fully CTU Code compliant

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	8.5	5.3	10.6
0.1	10.0	5.9	11.0
0.2	12.1	6.5	11.5
0.3	15.4	7.4	12.0
0.4	21.2	8.5	12.5
0.45	26.1	9.2	12.8
0.5	no slide	10.0	13.1
0.6	no slide	12.1	13.7
0.7	no slide	15.4	14.4



Practical calculations

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	13.0	8.1	16.3
0.1	15.3	9.0	16.9
0.2	18.6	10.0	17.6
0.3	23.6	11.3	18.3
0.4	32.5	13.0	19.1
0.45	40.0	14.1	19.6
0.5	no slide	15.3	20.0
0.6	no slide	18.6	21.0
0.7	no slide	23.6	22.0



System only

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	20.6	12.9	25.8
0.1	24.3	14.2	26.8
0.2	29.5	15.9	27.9
0.3	37.5	17.9	29.1
0.4	51.6	20.6	30.4
0.45	63.5	22.3	31.0
0.5	no slide	24.3	31.8
0.6	no slide	29.5	33.3
0.7	no slide	37.5	35.0



AnchorLash® 150.3 – 40ft CTU – Small BigBags with soft material

Fully CTU Code compliant

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	9.4	5.9	11.7
0.1	11.0	6.5	12.2
0.2	13.4	7.2	12.7
0.3	17.0	8.1	13.2
0.4	23.4	9.4	13.8
0.45	28.8	10.1	14.1
0.5	no slide	11.0	14.4
0.6	no slide	13.4	15.1
0.7	no slide	17.0	15.9



Practical calculations

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	14.5	9.0	18.1
0.1	17.0	10.0	18.8
0.2	20.7	11.1	19.5
0.3	26.3	12.6	20.4
0.4	36.1	14.5	21.3
0.45	44.5	15.6	21.7
0.5	no slide	17.0	22.2
0.6	no slide	20.7	23.3
0.7	no slide	26.3	24.5



System only

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	20.6	12.9	25.8
0.1	24.3	14.2	26.8
0.2	29.5	15.9	27.9
0.3	37.5	17.9	29.1
0.4	51.6	20.6	30.4
0.45	63.5	22.3	31.0
0.5	no slide	24.3	31.8
0.6	no slide	29.5	33.3
0.7	no slide	37.5	35.0



Large BigBags with soft materials

Flexboards are used to keep the lashings in place.

AnchorLash® 150.3 – 20ft CTU – Large BigBags with soft material

Fully CTU Code compliant

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	10.1	6.3	12.7
0.1	11.9	7.0	13.2
0.2	14.5	7.8	13.7
0.3	18.4	8.8	14.3
0.4	25.3	10.1	14.9
0.45	31.2	11.0	15.2
0.5	no slide	11.9	15.6
0.6	no slide	14.5	16.3
0.7	no slide	18.4	17.2



Practical calculations

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	16.2	10.1	20.2
0.1	19.0	11.1	21.0
0.2	23.1	12.4	21.8
0.3	29.4	14.1	22.8
0.4	40.4	16.2	23.8
0.45	49.7	17.5	24.3
0.5	no slide	19.0	24.9
0.6	no slide	23.1	26.1
0.7	no slide	29.4	27.4



System only

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	20.6	12.9	25.8
0.1	24.3	14.2	26.8
0.2	29.5	15.9	27.9
0.3	37.5	17.9	29.1
0.4	51.6	20.6	30.4
0.45	63.5	22.3	31.0
0.5	no slide	24.3	31.8
0.6	no slide	29.5	33.3
0.7	no slide	37.5	35.0



AnchorLash® 150.3 – 40ft CTU – Large BigBags with soft material

Fully CTU Code compliant

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	9.2	5.8	11.5
0.1	10.8	6.3	12.0
0.2	13.2	7.1	12.4
0.3	16.7	8.0	13.0
0.4	23.0	9.2	13.5
0.45	28.3	10.0	13.8
0.5	no slide	10.8	14.2
0.6	no slide	13.2	14.8
0.7	no slide	16.7	15.6



Practical calculations

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	14.2	8.9	17.7
0.1	16.7	9.8	18.4
0.2	20.3	10.9	19.2
0.3	25.8	12.3	20.0
0.4	35.5	14.2	20.9
0.45	43.7	15.3	21.3
0.5	no slide	16.7	21.8
0.6	no slide	20.3	22.9
0.7	no slide	25.8	24.1



System only

Friction factor, μ	Secured cargo weight in ton		
	Road (Doors to rear) & Rail	Road (Doors to front)	Sea area C
0.0	20.6	12.9	25.8
0.1	24.3	14.2	26.8
0.2	29.5	15.9	27.9
0.3	37.5	17.9	29.1
0.4	51.6	20.6	30.4
0.45	63.5	22.3	31.0
0.5	no slide	24.3	31.8
0.6	no slide	29.5	33.3
0.7	no slide	37.5	35.0



Notes regarding the application of the Cordstrap AnchorLash® 150.3 solution

Soft or deformable cargo should be adequately protected against breakage, damage or significant deformation, e.g. by applying edge protection and/or blocking boards. Appropriate measures should be applied to keep the lashing in the right position.

Please note that the values of secured cargo weight might differ slightly for specific solutions with different dimensions.